

Fast luminaire installation in light lines for T8 and T5 LED lamps



Product advantages:

- Quick and easy connection to the light strings by means of assembly elements
- Optimised weight and size thanks to compact design
- Standard handles G13 and G5
- Application: large-area facilities: production halls, warehouses, logistics centres, markets, workshops

Product features::

- Aluminium body
- Ambient operating temperature: -30°C ÷ +60°C
- 5-year warranty

General information

Ambient temperature range	-30°C ÷ +60°C
Mechanical impact protection code	IK 07
Protection index	IP 20
Input voltage	230V 50Hz
CE marking	Yes
Protection class IEC	Safety Class I
Materials	Cover: PVC
	Housing: aluminium profile
Colour	White
Lampholder	G13, G5
Includes light source	No

The method of installation:

- on a wire or chain

(manufacturer does not provide hanging)

- on surface

Technical data


Product name	Lampholder	Dimensions DxW mm	Weight g
M28	G13	320x 80	220
M44	G13	480x 80	300
M60	G13	632x 80	400
M74	G13	786x 80	450
M90	G13	938x 80	500
M120	G13	1242x 80	600
M150	G13	1542x 80	700
M300	G13	3084x 80	1500
M55	G5	592x 80	400
M85	G5	892x 80	500
M115	G5	1192x 80	600
M145	G5	1492x 80	700

Product data


Product name	Lampholder	Dimensions S mm	
		IP 20	IP 67
MXXX.1	single	37	46
MXXX.2	double	101	115
M300.4	2x2	101	115

Product data

Product name	Lampholder sealing class
MXX.Y.2	IP 20
MXX.Y.6	IP 67

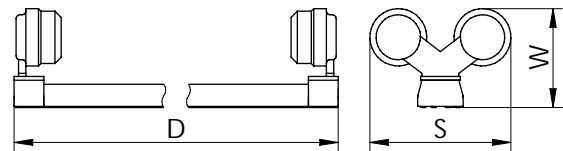

Lampholder type:

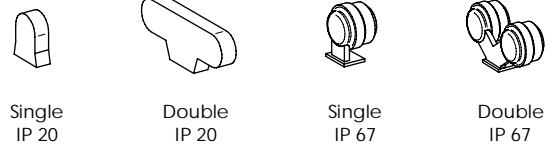

Accessories:

